




2T "Scissor Type" Cable Drum Stands SL2

The SL2 scissor lift drum roller will accommodate cable or rope drums up to a diameter of 1.6m (without chocking). The unit is supplied as 2 x scissor lift supports, which can be flattened for easy storage and transport, and includes 1 x 2.5m x 60mm shaft.

BASIC OPERATING INSTRUCTIONS

Once you have your cable or rope drum in the desired location, slide the shaft through the centre of the drum and line your scissor lifts supports up to the required width and height. After you have centred and secured the drum to the shaft the drum can be lifted off the ground by turning the scissor lift height adjustment screws in a clockwise direction. They are large threaded to minimise winding. To lower the drum, you wind the adjustment screws in an anti-clockwise direction.

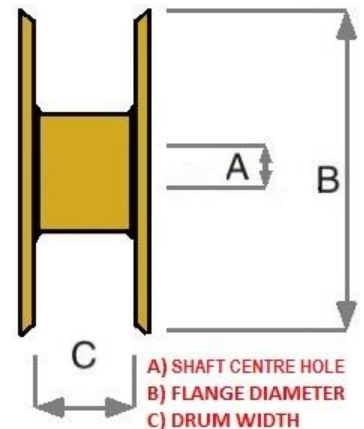

SUITS DRUM DIMENSIONS

A	Min 60 mm
B	Max 1,600 mm
C	Max 1,500 mm
WLL	Max 2,000 Kg

This equipment must be managed, installed and operated by suitably qualified and competent personnel only.

AUSTRALIA
E: hire@jackswinches.com
T: (+61)8 9 2584949

SINGAPORE
E: hire.jws@jackswinches.com
T: (+65) 68634470