



4T Diesel Winch C/W Side Capstan & Pendant Controls (Optional Loadcell)


Our Diesel hydraulic, self-contained units are a compact all in one solution that allows use without the need for external drive units. Suitable for general purpose lifting and pulling applications it features internal spring activated brakes & the hydraulic motor is fitted with over centre valve for added safety. This unit also features remote pendant controls which allow the operator to be further away from operating zone.

PERFORMANCE DATA

LINE-PULL 1 ST LAYER	7,000 KG
LINE-PULL FULL DRUM Lift Rating	4,000 KG
LINE-PULL CAPSTAN	5,000 KG
MAX LINE SPEED ON DRUM	47m / min
MAX LINE SPEED ON CAPSTAN	34m / min
BRAKING SYSTEM	Auto Disc (Lifting Suitable)

ROPE CAPACITY

2270m x 13mm	1500m x 16mm	1100m x 18mm	900m x 20mm
--------------	--------------	--------------	-------------

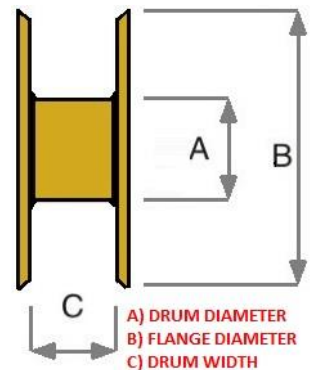

DRUM DIMENSIONS

A	400 mm
B	800 mm
C	955 mm

WINCH DIMENSIONS

L	2,050 mm
W	1,800 mm
H	2,105 mm

WEIGHT BARE DRUM

3,275 Kg

This equipment must be managed, installed and operated by suitably qualified and competent personnel only.

AUSTRALIA
E: hire@jackswinches.com
T: (+61)8 9 2584949

SINGAPORE
E: hire_jws@jackswinches.com
T: (+65) 68634470